



## SS 100W Super Slek



### Quality Product

All Manufactured modules are tested 100% by EL (Electroluminescence) during the Production Process & Free from micro cracks.

Our high-performance modules are highly efficient, reliable and provide optimal output.

The company manufactures solar modules in compliance with global standard including IEC 61215, 61730-1, 61730-2, 61701, UL 1703, UL 61730.

### High Efficiency .

High Module efficiency is obtaining top performance even in diffused light conditions.

We are leaders in providing our customers with maximum sunlight conversion.

### Application Possibilities

Residential and Commercial rooftops, Car ports, Solar Farming, Balconies, Awnings, Street lights, Fences, and Canopies.

### Our Team

We have a team of qualified experts and engineers making sure that modules produce maximum power. We pride ourselves in caring for each individual customer needs with detailed attention. Our end goal is to give a highly efficient product with exceptional customer service.

### Warranty

Our product is durable and has 10 years performance warranty. Integrated manufacturing of cells & modules in production line guarantees optimum performance.

### US OFFICE:

Sungen Power  
111 Charlotte Place Suite 101A  
Englewood Cliffs, NJ 07632  
Office Tel: 201-568-1424





## SS 100W Super Sleek

### Electric Performance Parameter

Model	SS-M-100
Nominal Maximum Power (Pmax/W)	100
Optimum Operating Voltage (Vmp/V)	18.64
Optimum Operating Current (Imp/A)	5.36
Open Circuit Voltage (Voc/V)	22.23
Short Circuit Current (Isc/A)	5.79

\* Measurement Power Tolerance on Power 0 / +%

\* Spectrum AM 1.5 and cell temperature of 25 °C

\* Under Standard Test Conditions (STC) of irradiance of 1000W/m<sup>2</sup>

\* Normal Operating cell Temperature (NOCT) of irradiance of 800W/m<sup>2</sup>, 20± 2° C

### Mechanical Parameter

Module Dimensions	1716 X 370 X 35 mm / 67.57 X 14.57 X 1.38 inch
Weight	7 kgs / 15.43 lbs
Cell Size (Monocrystalline)	156.75x87 mm / 6.17x3.42 inch
No Of Cell	36 (2 X 18)
Junction Box	PV-LH0801/ IP65 with diodes
Solar Cable (4mm <sup>2</sup> )	900mm (35.43 in) length 12AWB
Connectors	Mc4 compatible or IP67 rated
Glass (Tempered & Low Iron )	3.2mm (0.13in)
Frame	Anodized Aluminum Alloy
Encapsulate	EVA
Back Cover	Composite Sheet

### Temperature Coefficient

Coefficient of Current	+0.035% /°C
Coefficient of Voltage	-0.351% /°C
Coefficient of Power	-0.47% /°C

### Tested Operating Conditions

Temperature Cycling Range	-40°C to 85°C
Humidity Freeze, Damp Heat	85% RH


### Material and Workmanship Warranty

Product Warranty	5 Years
------------------	---------

### Performance Warranty

Solar Module	10 years
--------------	----------

### Module Drawing

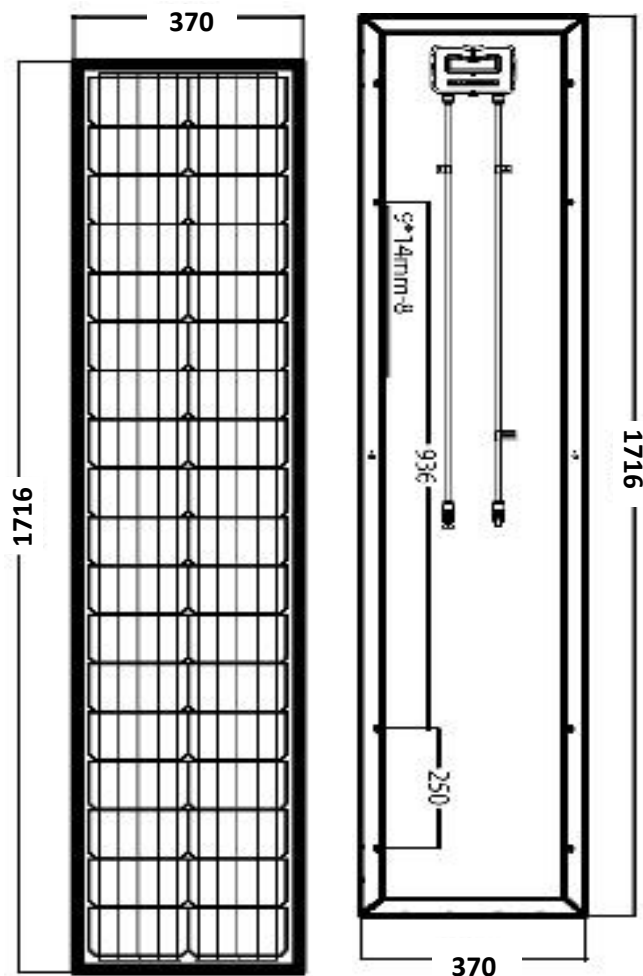

### IV Curve

